
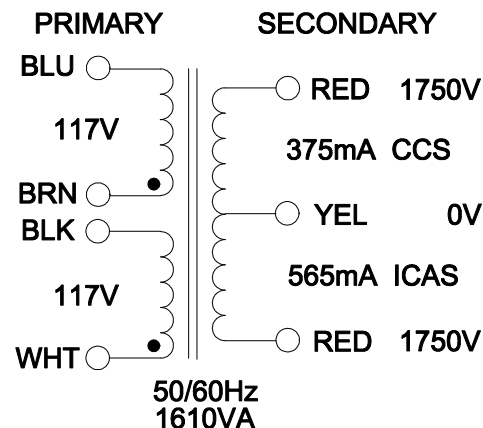


DIMENSIONS:

A	5.281" ±0.063
B	8.096" ±0.125
C	6.361" ±0.063
D	4.250" ±0.063
E	6.500" ±0.063
G	0.281" x 0.750" ±0.015

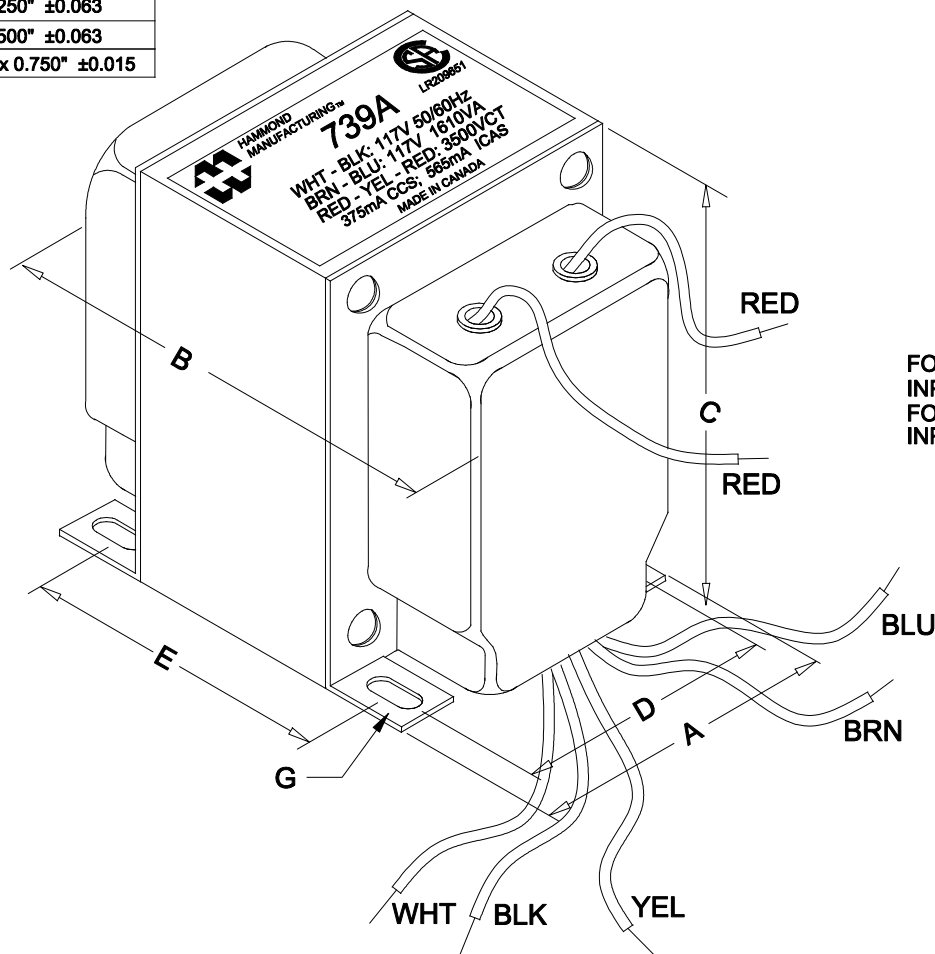

FOR 117V: CONNECT WHT & BRN TOGETHER AND BLK & BLU TOGETHER
INPUT: WHT - BLK
FOR 234V: CONNECT BLK & BRN TOGETHER
INPUT: WHT - BLU

NOTE: ALL LEADS 6.0" LONG MIN. STRIP 0.5".

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 117V, 60Hz, WHT - BLK	965mA Max.
Sec. N.L.V	@ 117V, 60Hz, WHT - BLK	
	RED - RED =	3594.5V ±2%
	RED - RED/YEL = RED/YEL - RED =	1797.3V ±2%
DCR	@ 20°C, WHT - BLK =	0.173 Ω ±20%
	@ 20°C, BRN - BLU =	0.184 Ω ±20%
	@ 20°C, RED - RED =	108.0 Ω ±20%
HIPOT	PRIMARY - SECONDARY	4500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 05/06/16	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181 FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: PLATE TRANSFORMER	DWG. NO. 739A
			DATE: 05/06/16	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		