


AMPLIMO Toroidal Output Transformer type 40PP6K5H

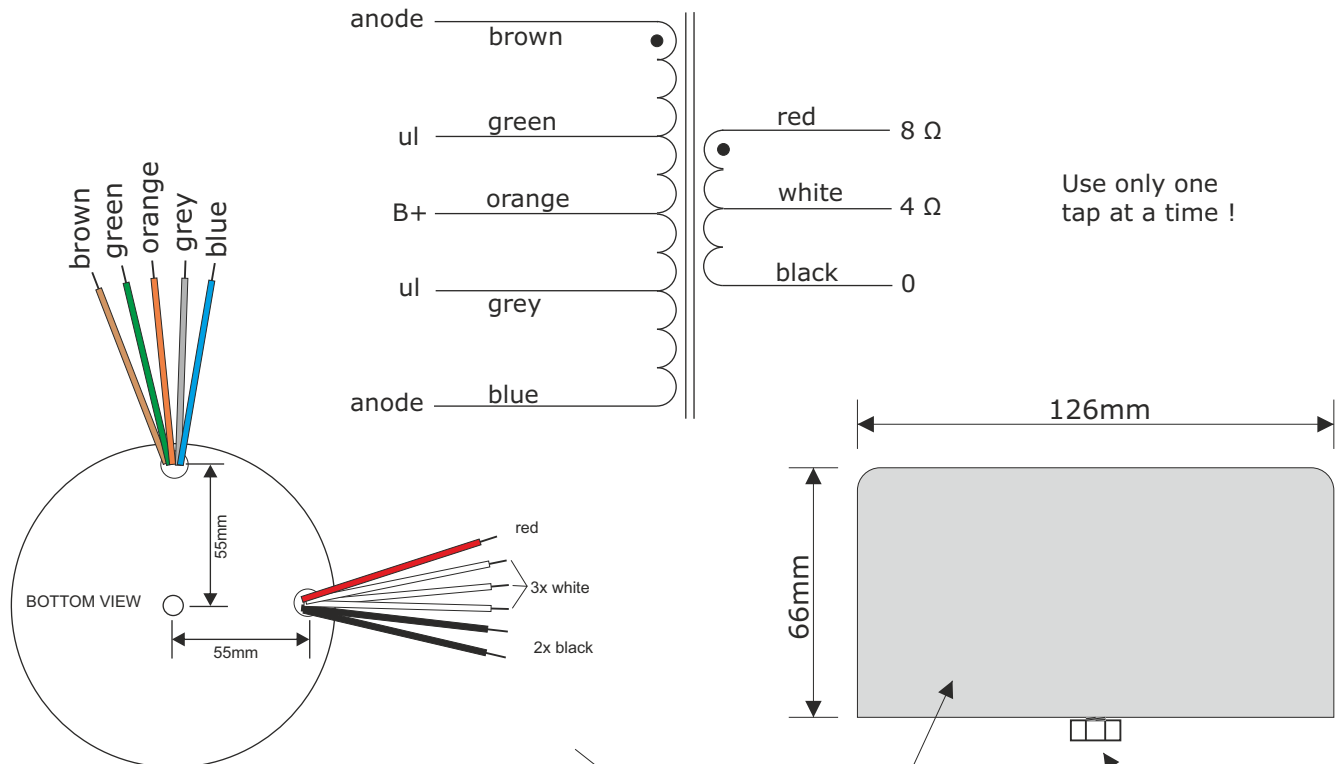

Use only one tap at a time !

Always connect 3 white wires together
Always connect 2 black wires together

In case the UL-leads (green and grey) are not used, insulate them carefully with heatshrink !

primary impedance	6500 Ω
secondary impedance	0 - 4 - 8 Ω
turns ratio	40.3 (4Ω) - 28.4 (8Ω)
UL-tap	35%
nominal power	40W
-3dB frequency bandwidth	1Hz - 133 kHz
power bandwidth (-3dB) starting at	19Hz
primary inductance	665H
primary leakage ind.	4mH
primary capacitance	1000pF
primary DC-resistance	64Ω
secondary DC-resistance	107mΩ(4Ω) 185mΩ(8Ω)
dimensions od x height	126mm x 66mm
mounting	M8x20 center bolt
weight	2.6kg
Leadlength	200mm



Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 283456
Fax+31 (0)545 283457

info@amplimo.nl
http://www.amplimo.nl

HB
May 2020

© Copyright Amplimo BV

40PP6K5H

Wide bandwidth toroidal tube output transformer

