




# 1650K


## "CLASSIC" PUSH-PULL TUBE TYPE ULTRA-LINEAR OUTPUT TRANSFORMERS

- Designed for push-pull tube output circuits.
- Enclosed (shielded), 4 slot, above chassis Type "X" mounting.
- Frequency response 30 Hz. to 30 KHz. at full rated power (+/- 1 db max. - ref. 1 KHz) minimum.
- Insulated flexible leads 9" min.
- Manufactured with plastic coil forms for coil support and insulation.
- Typical applications - Push-Pull: triode, Ultra-Linear pentode, pentode and tetrode connected audio output.
- Due to the unique interleaving of the windings BOTH secondary windings must be engaged to meet specifications (see hook-up diagrams below).
- Suggested tube types: 6L6GC, 807, 5881, EL34, 6146B, 6550B

ELECTRICAL SPECIFICATIONS	
Characteristic	Typical
Input Impedance	3400 Ohms
Output Impedance	4, 8 & 16 Ohms
Output Power	50 Watts
<b>DCR</b>	
Primary Brown-Red	34.4 Ohms
Primary Red-Blue	40.2 Ohms
Secondary Black-Green	0.290 Ohm
Secondary Black/Yel-Yel	0.480 Ohm
<b>Inductance   Impedance</b> @ 60Hz, 10.0V OC	
Primary Brown-Red	225H   114KOhm
<b>Leakage Inductance</b> @ 60Hz, 10.0V SC	
Primary Brown-Red	5.98mH
<b>Dielectric Strength</b> 2000Vrms	
<b>Temperature Range</b> -40 To 105°C	



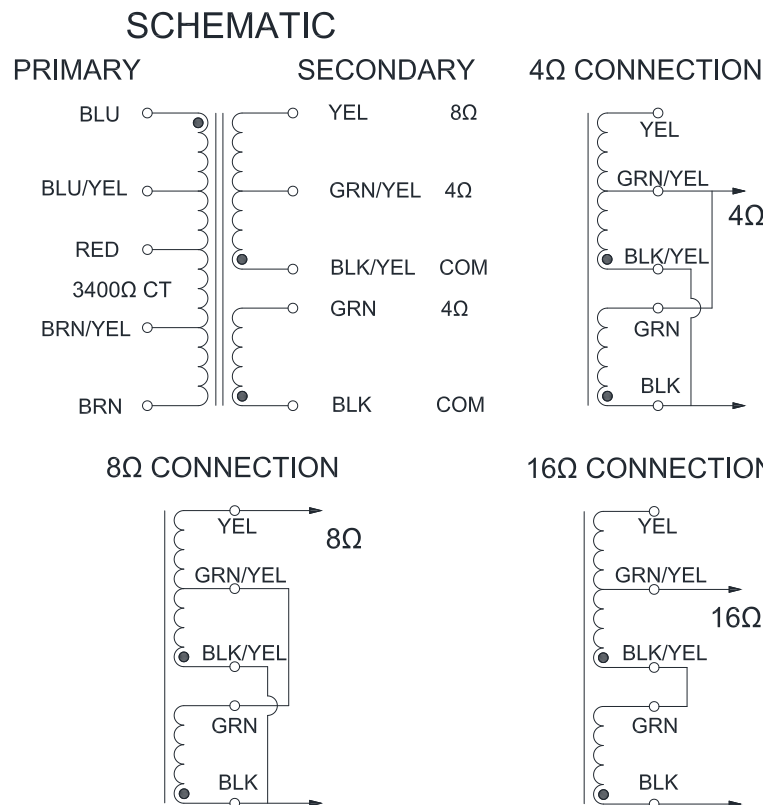


### LABEL:

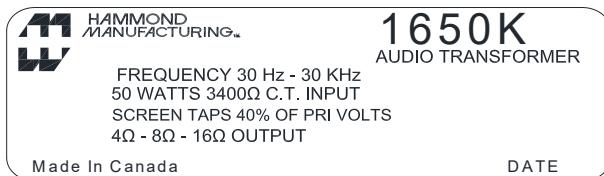

Note: The above examples of possible combinations are to help you narrow down the choices of transformers for your favorite tube types. How you operate the tubes (push-pull, push-pull parallel, ultra-linear, class, B+, bias, operating points, etc.) will change optimum plate to plate load 4040 watts manufacturer's technical data sheets should be consulted first, before making a decision on a proper output transformer.

**DIMENSIONAL DETAILS:**

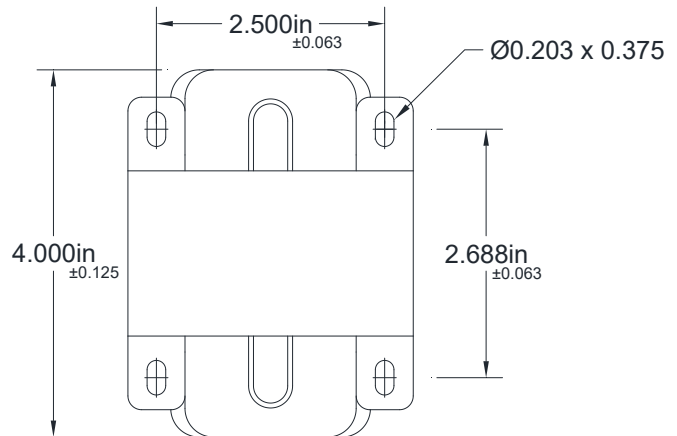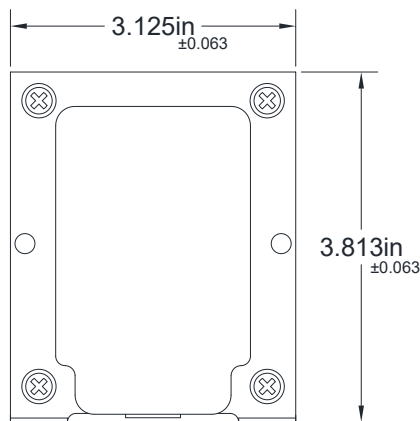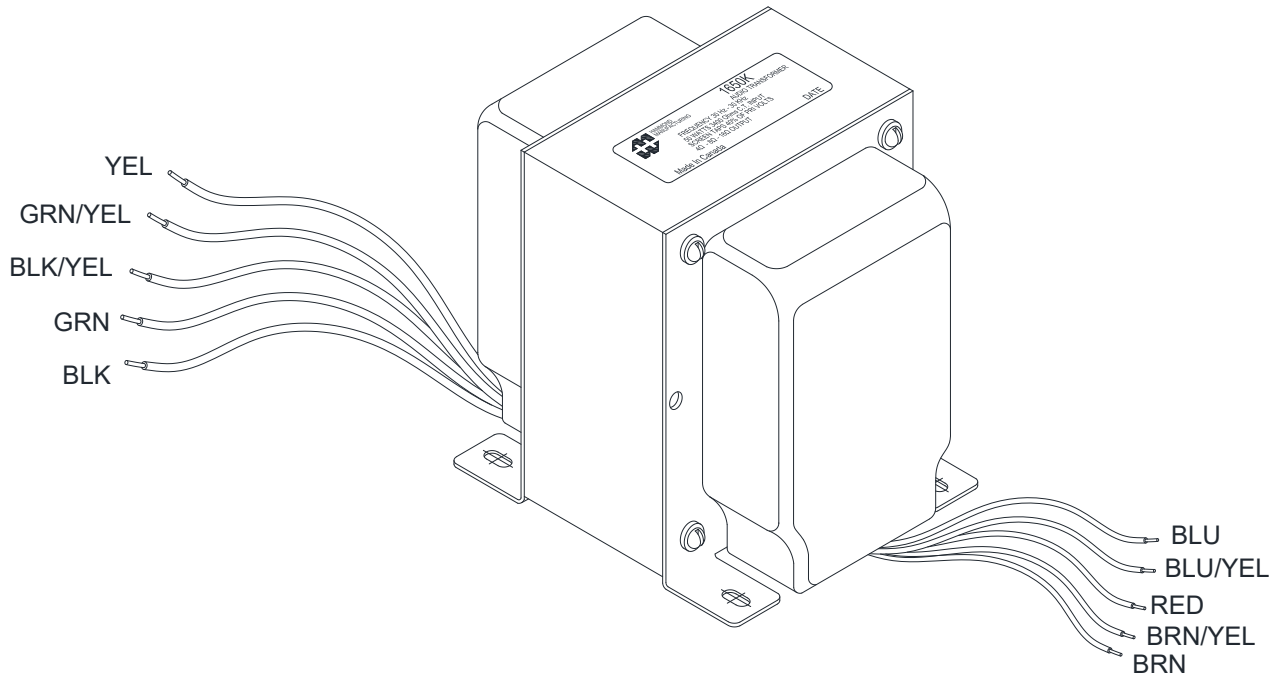


**TEST CONDITIONS**


Measurement Instruments:  
 dScope Series III Audio Analyzer  
 Wayne Kerr 3255B with a 3265B Inductance Analyzer  
 HP 4192a LF Impedance Analyzer  
 Keithley 2010 DVM

\* All graphs input level 27dBu @1.0KHz reference.  
 \*\*The results are typical and are subject to normal manufacturing and electrical tolerances.


**TYPICAL TEST CIRCUIT**

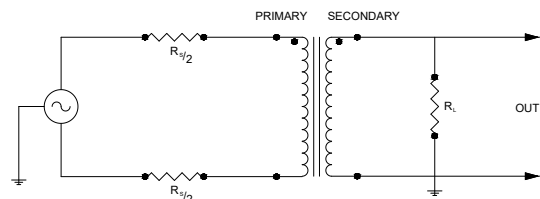

### 1650K Frequency Response RS = 3400 Ohms

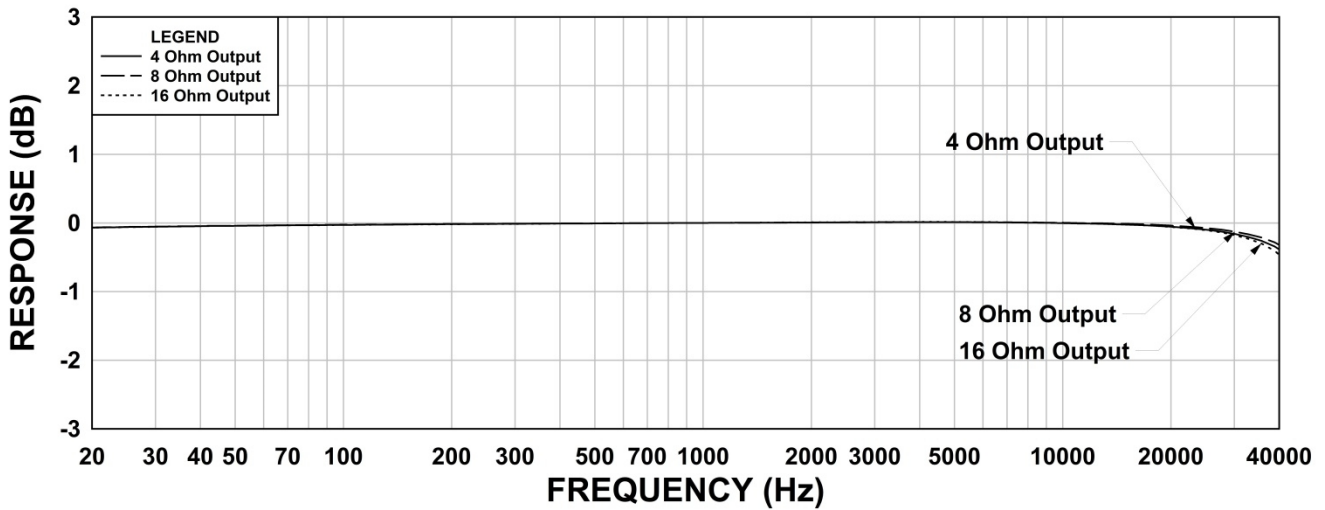

### 1650K Phase Shift RS = 3400 Ohms

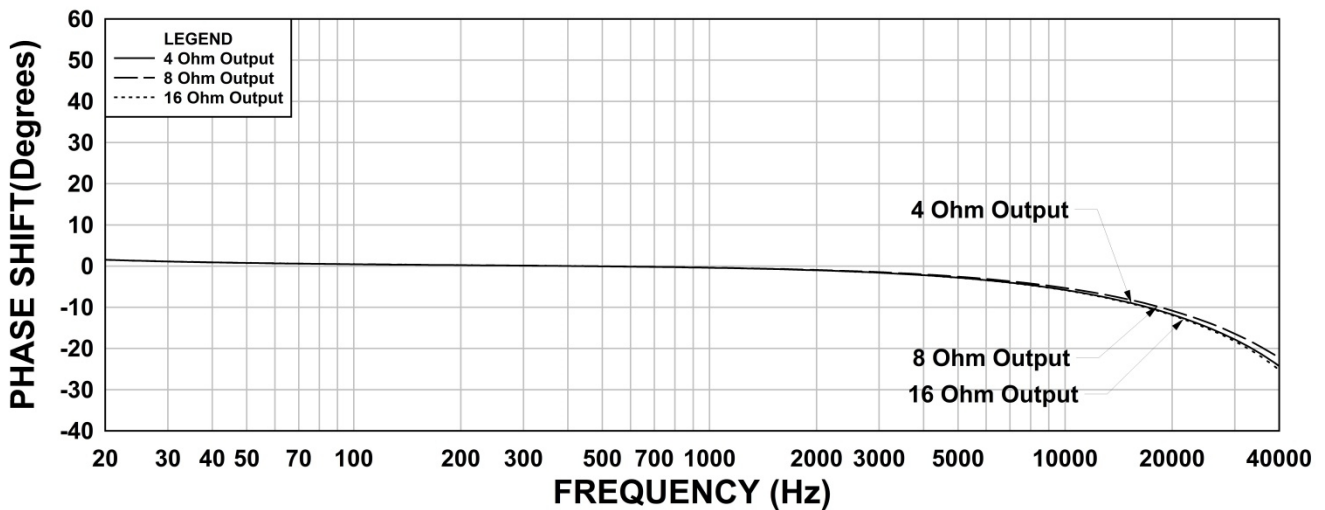

### 1650K THD+N RS = 3400 Ohms

