




1645

"CLASSIC" PUSH-PULL TUBE TYPE ULTRA-LINEAR OUTPUT TRANSFORMERS


- Designed for push-pull tube output circuits.
- Enclosed 4 slot, above chassis Type "X" mounting.
- Frequency response 30 Hz. to 30 KHz. at full rated power (+/- 1 db max. - ref. 1 KHz) minimum.
- Insulated flexible leads 8" min.
- Manufactured with plastic coil forms for coil support and insulation.
- Typical applications - Push-Pull: triode, Ultra-Linear pentode, pentode and tetrode connected audio output.
- Due to the unique interleaving of the windings BOTH secondary windings must be engaged to meet specifications (see hook-up diagrams below).
- Suggested tube types: 6L6GC, 6V6, 807, 5881, EL34

ELECTRICAL SPECIFICATIONS	
Characteristic	Typical
Input Impedance	5000 Ohms CT
Output Impedance	4, 8 & 16 Ohms, 70V
Output Power	30 Watts
DCR	
Primary BLU-RED	88.2 Ohms
Primary RED-BRN	77.2 Ohms
Secondary BLK-GRN	0.270 Ohm
Secondary BLK/YEL-GRN/YEL	0.323 Ohm
Secondary BLK/YEL-YEL	0.440 Ohm
Secondary BLK/YEL-WHT	4.035 Ohms
Inductance Impedance @ 60Hz, 10.0V OC	
Primary Brown-Red	180H 82KOhm
Leakage Inductance @ 60Hz, 10.0V SC	
Primary Brown-Red	5.0mH
Dielectric Strength	2000Vrms
Temperature Range	-40 To 105°C


SCHEMATIC

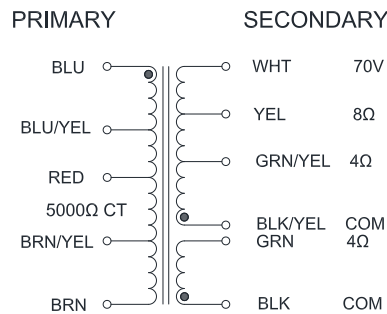


4Ω CONNECTION




8Ω CONNECTION




16Ω CONNECTION



70V CONNECTION






LABEL:

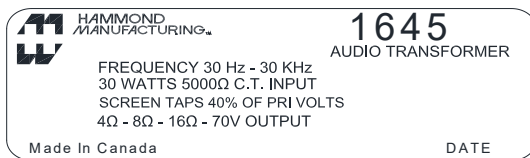

Note: The above examples of possible combinations are to help you narrow down the choices of transformers for your favorite tube types. How you operate the tubes (push-pull, push-pull parallel, ultra-linear, class, B+, bias, operating points, etc.) will change optimum plate to plate load impedance. Only a few of the most popular tubes are shown. As more tubes become available we will add them to the list. A tube manual or tube manufacturer's technical data sheets should be consulted first, before making a decision on a proper output transformer.

DIMENSIONAL DETAILS:

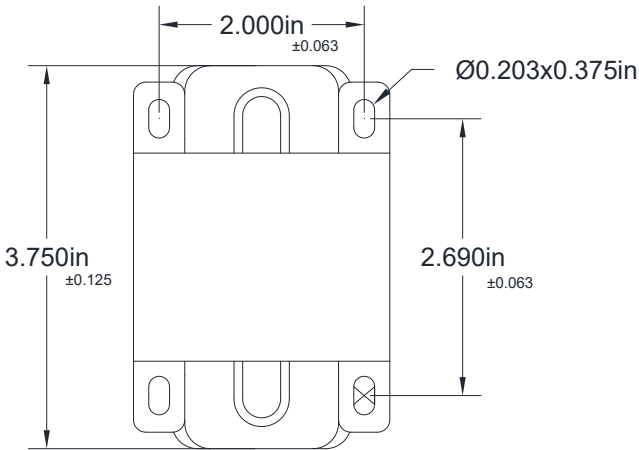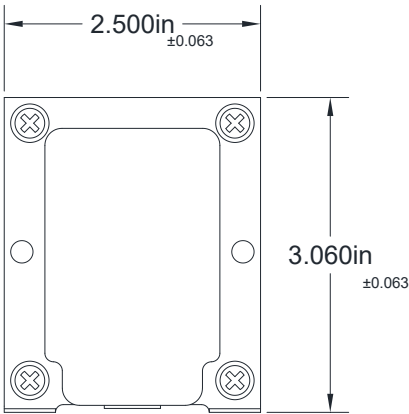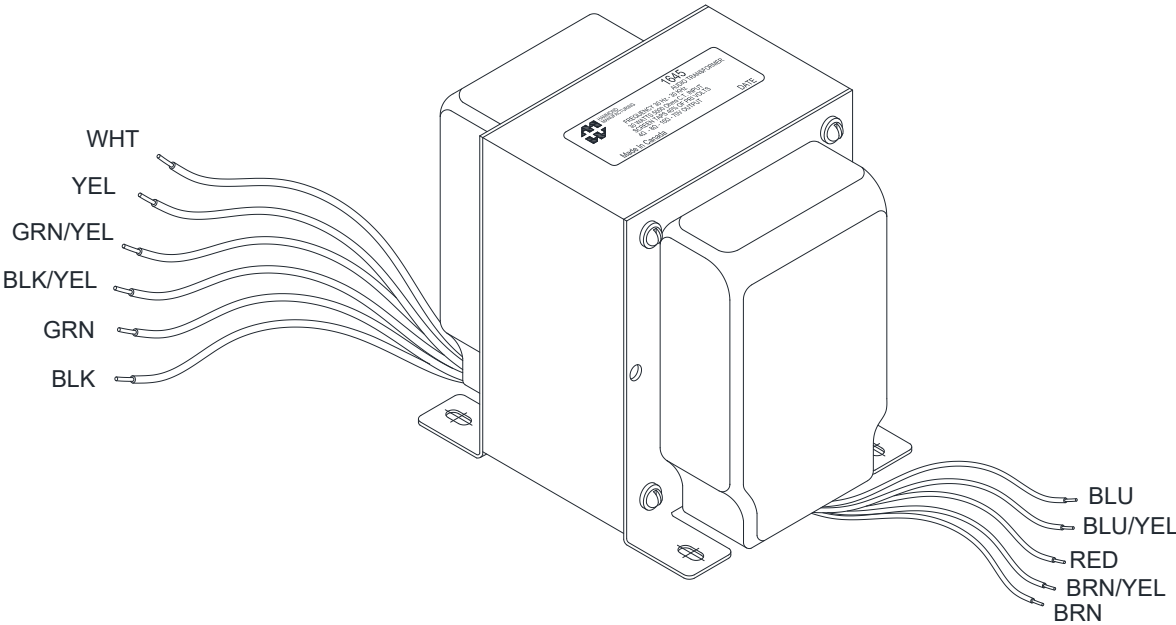


TEST CONDITIONS

Measurement Instruments:
 dScope Series III Audio Analyzer
 Wayne Kerr 3255B with a 3265B Inductance Analyzer
 HP 4192a LF Impedance Analyzer
 Keithley 2010 DVM


* All graphs input level 20dBu @1.0KHz reference.
 **The results are typical and are subject to normal manufacturing and electrical tolerances.

TYPICAL TEST CIRCUIT

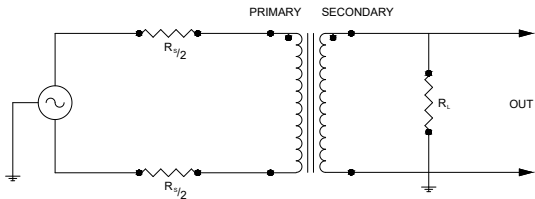


1645 Frequency Response

RS = 5K Ohms @ 1KHz Reference

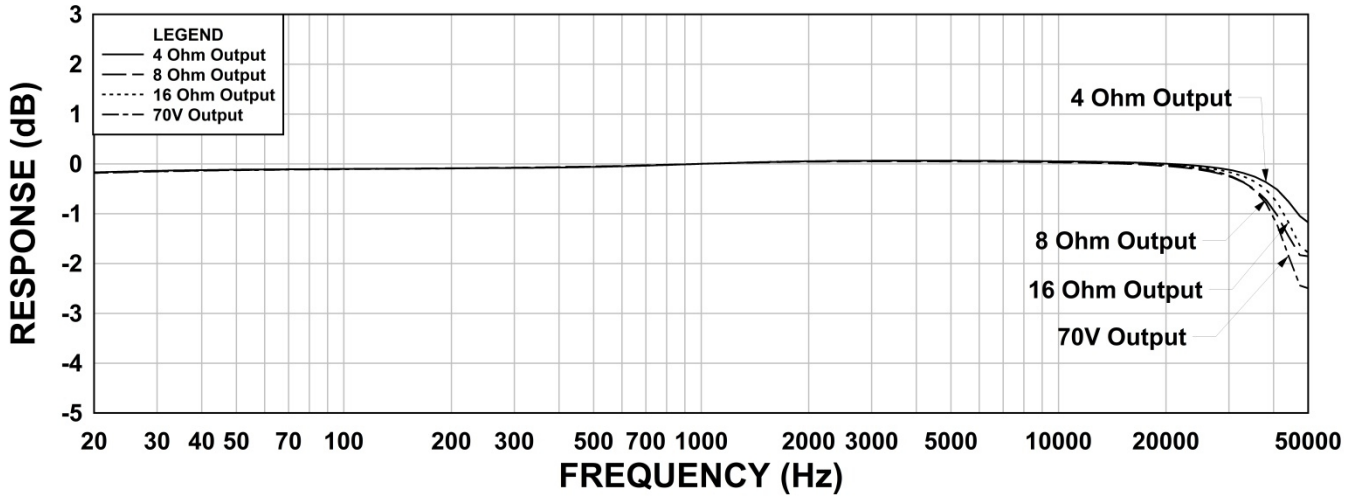

1645 Phase Shift

RS = 5K Ohms @ 1KHz Reference

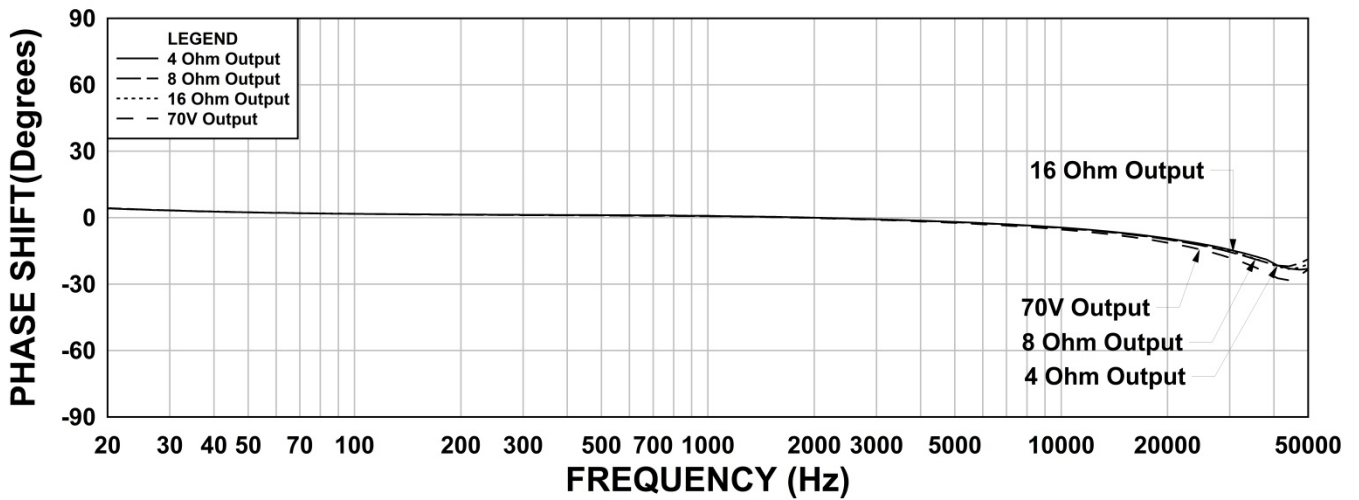

1645 THD+N

RS = 5K Ohms @ 1KHz Reference

