


TUNG-SOL

DOUBLE TRIODE

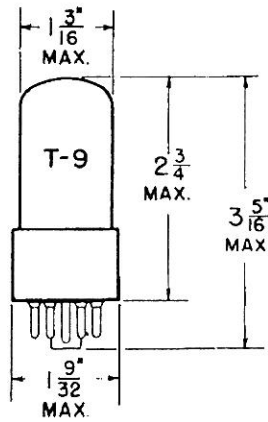

GLASS BULB


COATED UNIPOTENTIAL CATHODE

HEATER

6.3 VOLTS 0.30 AMP.

AC OR DC

ANY MOUNTING POSITION



BOTTOM VIEW
INTERMEDIATE SHELL
8 PIN OCTAL

880

THE 6SL7GT COMBINES TWO INDEPENDENT HIGH-MU TRIODES IN ONE ENVELOPE. IT IS DESIGNED PRIMARILY FOR PHASE INVERTER SERVICE.

RATINGS

INTERPRETED ACCORDING TO DESIGN CENTER SYSTEM

HEATER VOLTAGE	6.3	VOLTS
MAXIMUM HEATER-CATHODE VOLTAGE	90	VOLTS
MAXIMUM PLATE VOLTAGE	300	VOLTS
MAXIMUM POSITIVE DC GRID #1 VOLTAGE	0	VOLTS
MAXIMUM PLATE DISSIPATION (EACH UNIT)	1	WATT

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CLASS A₁ AMPLIFIER - EACH TRIODE UNIT

HEATER VOLTAGE	6.3	VOLTS
HEATER CURRENT	0.30	AMP.
PLATE VOLTAGE	250	VOLTS
GRID VOLTAGE	-2	VOLTS
PLATE CURRENT	2.3	MA.
PLATE RESISTANCE	44 000	OHMS
TRANSCONDUCTANCE	1 600	μMHOS
AMPLIFICATION FACTOR	70	

TUNG-SOL

CONTINUED FROM PRECEDING PAGE

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS - CONT'D.

RESISTANCE COUPLED AMPLIFIER - EACH TRIODE UNIT*

HEATER VOLTAGE	6.3	6.3	VOLTS
HEATER CURRENT	0.30	0.30	AMP.
PLATE SUPPLY VOLTAGE	90	250	VOLTS
CONTROL GRID VOLTAGE	0	0	VOLTS
PLATE LOAD RESISTOR	200 000	470 000	OHMS
CONTROL GRID RESISTOR	10.0	10.0	MEGOHMS
INPUT CONDENSER	0.01	0.01	μf
OUTPUT CONDENSER	0.01	0.01	μf
GRID RESISTOR OF FOLLOWING STAGE	470 000	470 000	OHMS
SIGNAL SOURCE IMPEDANCE (MAX.)	1 000	1 000	OHMS
DISTORTION	5	5	PERCENT
OUTPUT VOLTAGE	8.0	37	VOLTS
VOLTAGE GAIN AT 400 CPS.	34	45	

*INDICATES AN ADDITION.