


WIDE BANDWIDTH TOROIDAL PUSH-PULL TUBE OUTPUT TRANSFORMER


Type and Application	:	VDV6040PP = PAT4002: 2 x EL34.
Primary Impedance	:	Raa 5.879 [k]
Secondary Impedance	:	Rls 5 []
Turns Ratio Np/Ns	:	Ratio 34.29 []
Ultra Linear Tapping at	:	tap 40 [%]
-1 dB Frequency Range [Hz to kHz] (3):	:	flf 3.903 fhf 24.035
-1 dB Frequency Range [Hz to kHz] (3):	:	fl1 1.665 fh1 53.492
-3 dB Frequency Range [Hz to kHz] (3):	:	fl3 0.847 fh3 98.828
Nominal Power (1)	:	Pn 40 [W]
-3 dB Power Bandwidth starting at	:	fu 25 [Hz]
Total primary Inductance (2)	:	Lp 535 [H]
Primary Leakage Inductance	:	lsp 3.7 [mH]
Effective Primary Capacitance	:	cip 0.613 [nF]
Total Primary DC Resistance	:	Rip 68.1 []
Total Secondary DC Resistance	:	Ris 0.158 []
Tubes Plate Resistance per section	:	ri 2.65 [k]
Insertion Loss	:	lloss 0.184 [dB]
Q-factor 2nd order HF roll-off (5)	:	Q 0.496 []
HF roll-off Specific Frequency (5)	:	Fo 155.213 [kHz]
Quality Factor (5)	:	QF 1.446*10 ⁵ []
Quality Decade Factor = log(QF) (5)	:	QDF 5.16 []
Tuning Factor (5)	:	TF 0.807 []
Tuning Decade Factor = log(TF) (5)	:	TDF -0.093 []
Frequency Decade Factor (4,5)	:	FDF 5.067 []

VANDESIGNED BY
VANDERVEEN

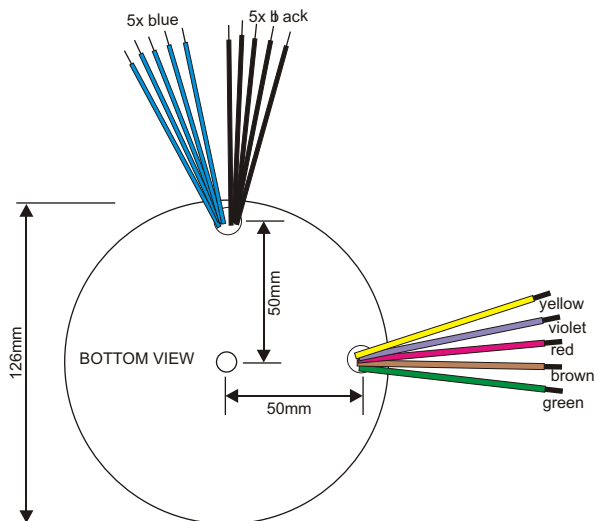

- (1): calculated under the conditions of balancing the DC-currents and the AC-anode voltages of the powertubes driving the transformer
- (2): maximum value, measured over secondary, transferred to primary
- (3): calculation at 1 mWatt in Rls; ri and Rls are pure Ohmic
- (4): defined as FDF = log(fh3/fl3) = number of frequency decades transferred
- (5): ir. Menno van der Veen; Theory and Practise of Wide Bandwidth Toroidal Output Transformers; preprint 3887, 97th AES Convention San Francisco
- (C): Copyright 1994 Vanderveen; Version 1.7; design date.....

Always connect the five blue wires together
Always connect the five black wires together
diameter approx.126mm
height approx.65mm
Lead length solid leads approx. 200mm
fully potted in aluminium black textured shell

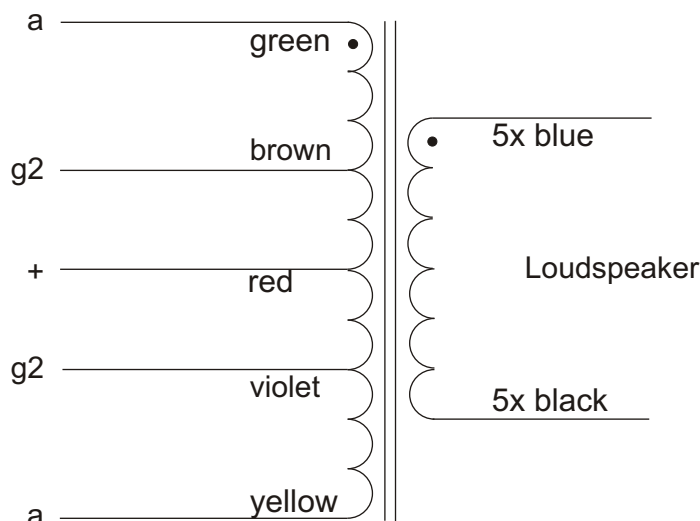

Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 28 3456
Fax+31 (0)545 28 3457

info@amplimo.nl
http://www.amplimo.nl


HB	02-03-2003
©	Copyright Amplimo BV

VDV6040PP / PAT4002


WIDE BANDWIDTH TOROIDAL
PUSH-PULL TUBE OUTPUT TRANSFORMER

WIDE BANDWIDTH TOROIDAL PUSH-PULL TUBE OUTPUT TRANSFORMER ; 6040=PAT4002

Frequency Response; Vertical 1 dB/div; Horizontal .1 Hz to 1 MHz (3)

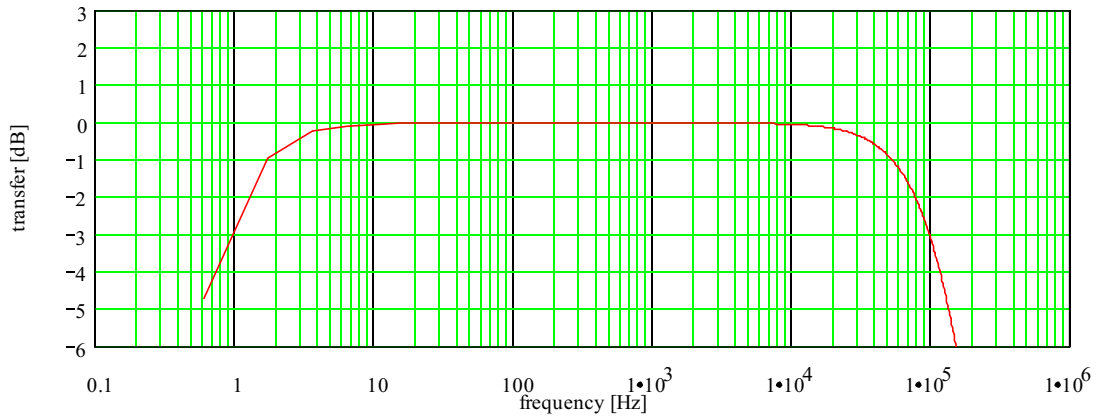

Phase Response; Vertical 30 deg./div; Horizontal .1 Hz to 1 MHz

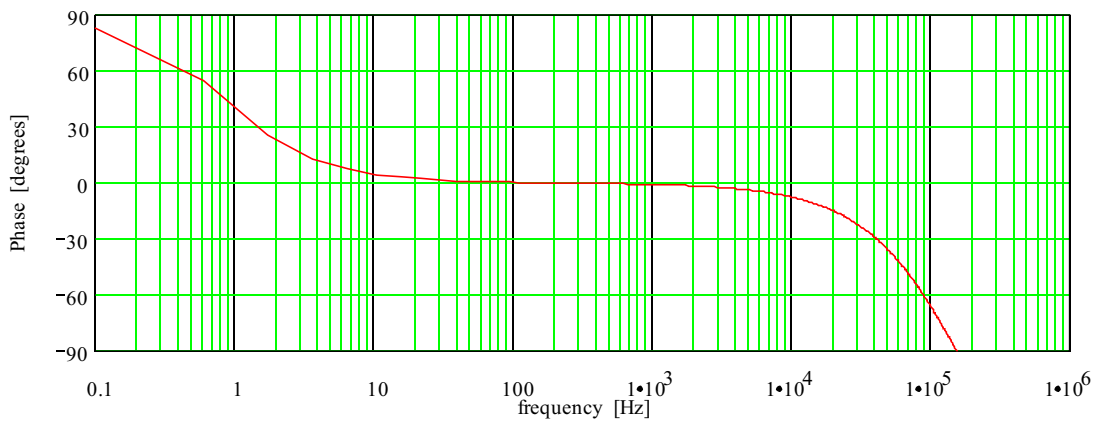

Differential Phase Distortion; vert. 30 deg./div; hor. .1 Hz to 1 MHz

See: W.M.Leach, Differential Time Delay.; JAES sept.89 pp.709-715

