



info@btb-elektronik.de

274B



Filament Heating

$U_f=5\text{ V}$

$I_f= 3\text{A}$


Limited Rated Values

$U_a(\text{max. pk, inverse})=1550\text{V}$

$I_a(\text{max. pk})=750\text{mA}$

Recommended Working Conditions

Anode Voltage Supply	2x500V
Impedance for each side	75Ω
Loaded Impedance	2000Ω
Filter capacitance	4μF
Rectifier current	≅ 230mA

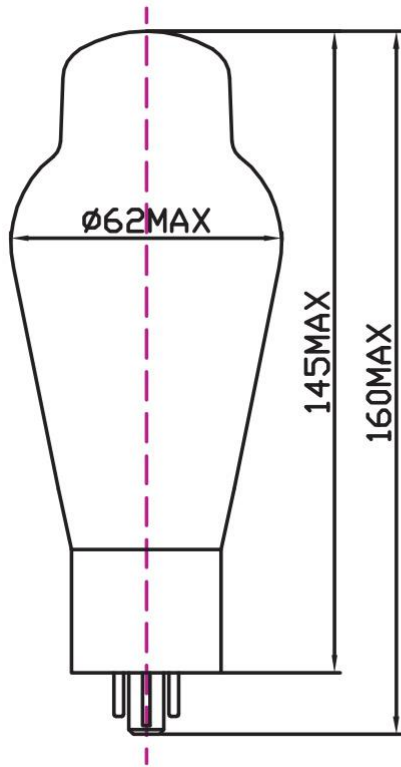

274B

电极与引线连接图

