





PLATE CHARACTERISTICS

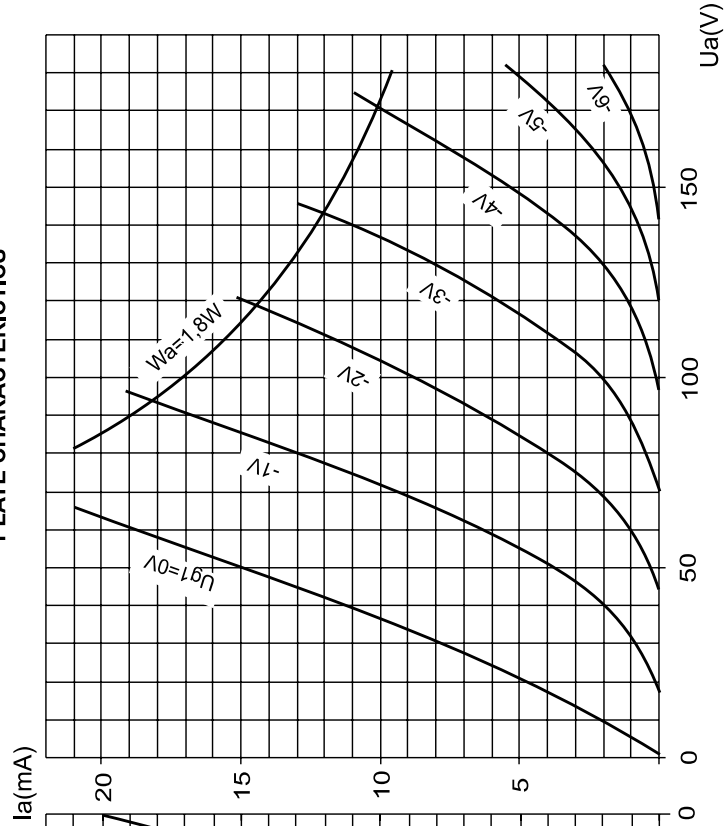

TRANSFER CHARACTERISTICS

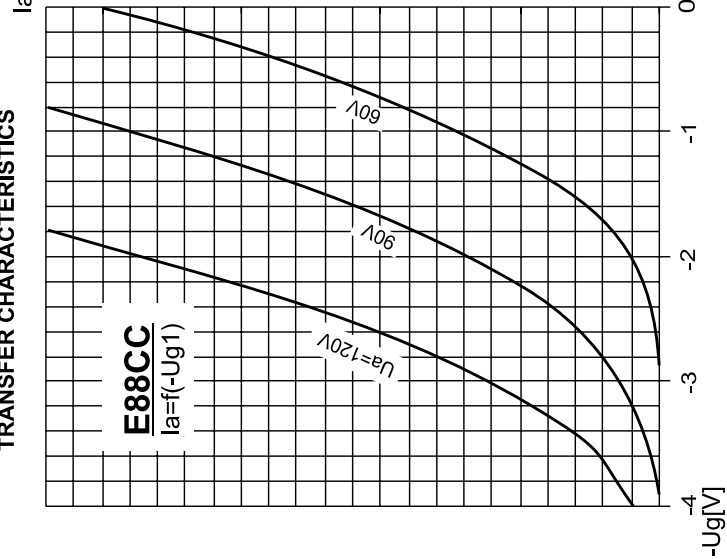

E88CC

R. F. DOUBLE TRIODE
Base: NOVAL

$$U_f = 6,3 \text{ V}$$

$$I_f = 365 \text{ mA}$$

Typical characteristic:

$$U_a = 90 \text{ V}$$

$$U_g = -1,3 \text{ V}$$

$$I_a = 15 \text{ mA}$$

$$S = 12,5 \text{ mA/V}$$

$$R_i = 2,6 \text{ k}\Omega$$

$$\mu = 33$$

Limiting values:

$$U_{a0} = 550 \text{ V}$$

$$U_{a(Ia=0)} = 400 \text{ V}$$

$$U_a = 220 \text{ V}$$

$$U_{a(War<0,8 \text{ W})} = 250 \text{ V}$$

$$P_{aR} = 1,5 \text{ W}$$

$$W_{g1R} = 0,03 \text{ W}$$

$$I_k = 20 \text{ mA}$$

$$U_g = -100 \text{ V}$$

$$R_g = 1 \text{ M}\Omega$$

$$U_{+k/f} = 120 \text{ V}$$

$$U_{-k/f+} = 60 \text{ V}$$

$$R_{k/f} = 20 \text{ k}\Omega$$

Capacitances:

| | |
|-----------------|------------|
| system I. | system II. |
| $C_{g/k} = 3,1$ | 3,1 pF |
| $C_a = 0,18$ | 0,18 pF |
| $C_{g/a} = 1,4$ | 1,4 pF |

Dimension and connections:

