



DIMENSIONS:	
A	4.000" ± 0.063
B	2.085" ± 0.125
C	2.625" ± 0.063
D	3.563" ± 0.063
G	0.187" ± 0.015

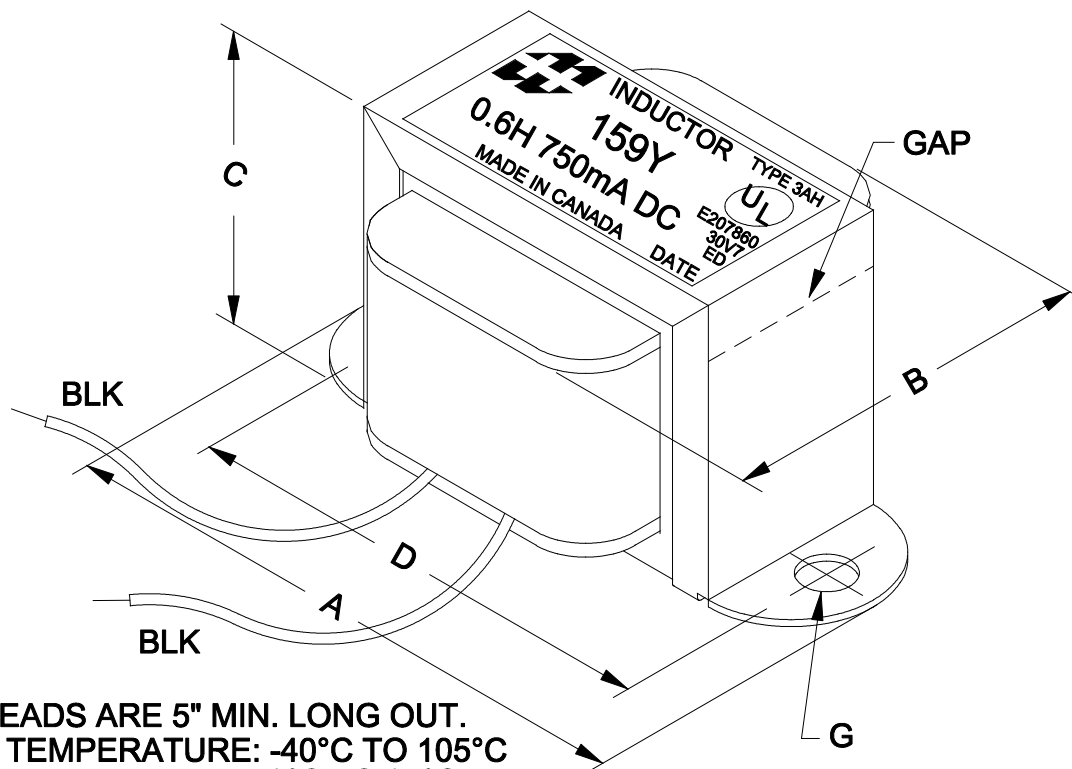

NOTE: ALL LEADS ARE 5" MIN. LONG OUT.
OPERATING TEMPERATURE: -40°C TO 105°C
STORAGE TEMPERATURE: -40°C TO 85°C
MANUFACTURED USING CLASS B (130°C) MATERIALS.
RoHS & REACH COMPLIANT

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
INDUCTANCE	@ 30V, 60Hz, 750mA DC, BLK - BLK	0.6H $\pm 15\%$
DCR	@ 20°C , BLK - BLK =	10.40 Ω $\pm 15\%$
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

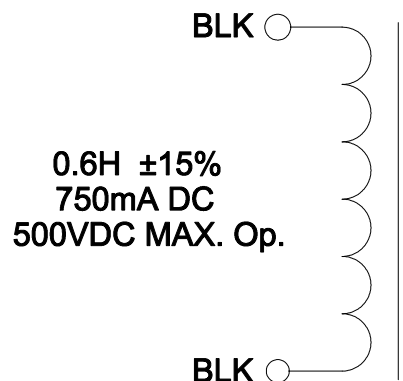

ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

TITLE

CHOKE

NO	DATE	REVISION	DWG. BY
0	12/12/19	RELEASED. C.I.	C. ILIE
			DATE
			12/12/19
			DIM IN(X)MM()

159Y