
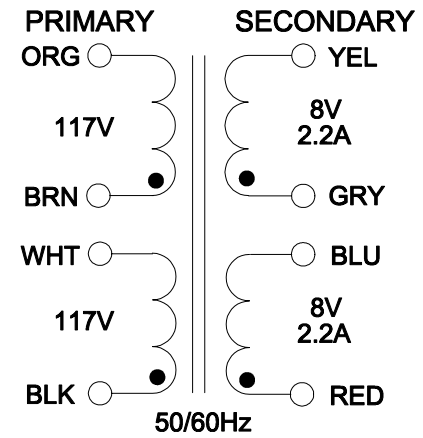


DIMENSIONS:	
A	3.688" ±0.063
B	2.125" ±0.125
C	2.308" ±0.063
D	3.125" ±0.063
E	1.076" ±0.063
F	2.701" ±0.063
G	0.187" ±0.015

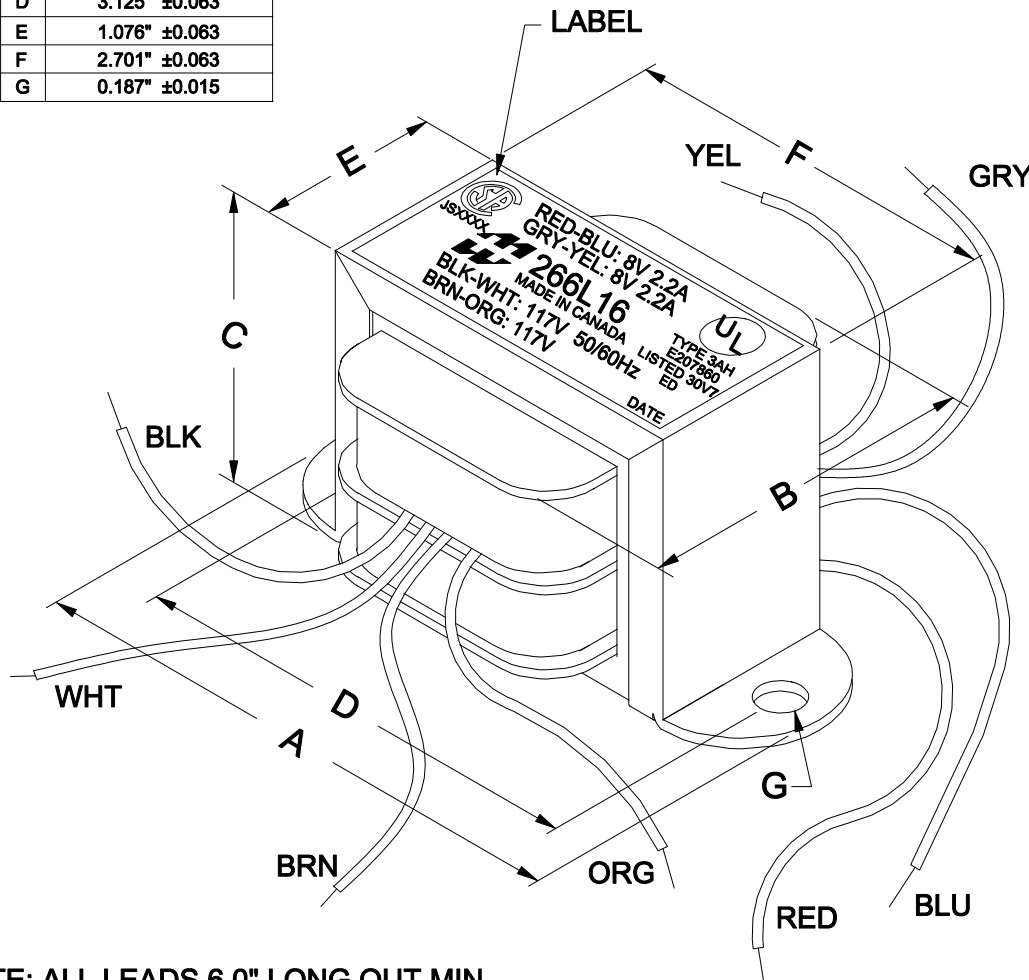

FOR 234V:
CONNECT WHT & BRN
INPUT BLK TO ORG

FOR 117V:
CONNECT ORG & WHT,
BRN & BLK
INPUT BLK TO WHT

FOR SERIES 16V @ 2.2A
CONNECT GRY & BLU
INPUT RED TO YEL

FOR PARALLEL 8V @ 4.4A
CONNECT YEL & BLU,
GRY & RED
INPUT RED TO BLU

NOTE: ALL LEADS 6.0" LONG OUT MIN.

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
lex	@ 117V, 60Hz, BLK - WHT	70mA Max.
Sec. N.L.V	@ 117V, 60Hz, BLK - WHT	
	BRN - ORG =	117.0V ±2%
	RED - BLU =	9.867V ±2%
	GRY - YEL =	9.867V ±2%
DCR	@ 20°C, BLK - WHT =	26.22 Ω ±20%
	@ 20°C, BRN - ORG =	31.25 Ω ±20%
	@ 20°C, RED - BLU =	0.174 Ω ±20%
	@ 20°C, GRY - YEL =	0.211 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION		52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5	PH # (519) 886-6181 FAX # (519) 886-9540
0	RELEASED.	C.I. 06/21/21	MANUFACTURING™			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 266L16
			DATE: 06/21/21	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		